



# FLR INDUSTRIAL MARKETING

PRODUCT CATALOGUE

2026

# WELCOME TO OUR PRODUCT CATALOG

## ABOUT US

### Who are we?

**FLR Industrial Marketing is a trusted supplier of industrial sealing solutions in the Philippines. We specialize in oil seals, O-rings, and hydraulic seals designed to meet the demands of automotive, hydraulic, and industrial applications.**

Our products are carefully selected for durability, oil resistance, and long service life, helping businesses reduce downtime and maintain reliable operations. We support workshops, factories, maintenance teams, and resellers with consistent quality, accurate sizing, and dependable supply.

With on-hand stocks and nationwide delivery, FLR Industrial Marketing is committed to fast response, practical solutions, and long-term partnerships built on trust and performance.

#### *Why choose FLR?*

- ✓ *Quality materials (NBR, FKM / Viton, and more)*
- ✓ *Wide range of sizes and applications*
- ✓ *On-hand stocks for faster fulfillment*
- ✓ *Reliable support for industrial professionals*



# ABOUT OUR PRODUCTS

## THE BEST SEALING SOLUTIONS FOR YOUR BUSINESS

At FLR Industrial Marketing, we supply high-quality industrial sealing products engineered for reliability, precision, and long-term performance. Our product range is designed to support automotive, hydraulic, and industrial machinery applications, where consistent sealing and durability are critical.


Our core products include Oil Seals, O-Rings, and Hydraulic Seals, available in various sizes, profiles, and materials to suit different operating conditions. Each product is selected to withstand oil exposure, pressure, temperature changes, and continuous operation, helping minimize leaks, reduce wear, and extend equipment life.

We focus on practical, real-world applications—from workshops and maintenance teams to factories and heavy equipment operations. With on-hand stocks and dependable sourcing, we help our customers keep machines running efficiently and avoid costly downtime.

## Built for Performance & Reliability

Our sealing solutions are manufactured using trusted materials such as NBR and FKM (Viton), ensuring compatibility with oils, fluids, and demanding industrial environments. Every product is chosen with attention to fit, consistency, and performance, making them suitable for both replacement and OEM-equivalent use.

Whether for routine maintenance or critical industrial systems, FLR products deliver reliable sealing you can depend on—day after day.

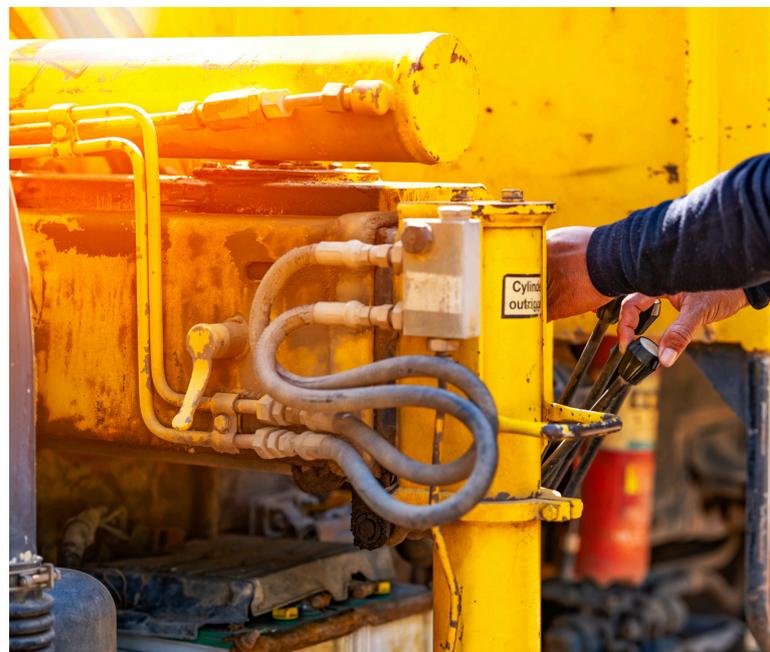

# OUR PRODUCTS

## THE BEST PRODUCTS JUST FOR YOU

At FLR Industrial Marketing, we offer a carefully selected range of industrial sealing products designed for durability, accuracy, and dependable performance. Our catalogue features oil seals, O-rings, and hydraulic seals suitable for automotive, hydraulic, and industrial machinery applications.

Each product is available in multiple sizes and materials to meet different operating requirements. Whether for maintenance, repair, or replacement, our products help ensure reliable sealing, reduced leakage, and extended equipment life.

**OIL SEAL**  
VC MATERIAL



**VC**  
(FPM/FKM)

- ✓ OIL & GREASE RESISTANT
- ✓ CHEMICAL RESISTANT
- ✓ WEAR RESISTANT

PAGE 8

**O-RINGS**  
VITON & NBR MATERIAL



**VITON**  
(FKM)

- ✓ CHEMICAL & HEAT RESISTANT

**NBR**

- ✓ OIL & ABRASION RESISTANT

PAGE 9

**WEAR RINGS**  
PHE MATERIAL



**PHE**

- ✓ SELF LUBRICATING
- ✓ THERML RESISTANT
- ✓ WEAR RESISTANT

PAGE 10

# OUR PRODUCTS

## PISTON SEALS DC12 MATERIAL



- ✓ OIL & GREASE RESISTANT
- ✓ WEAR RESISTANT
- ✓ DURABLE

PAGE 11

## ROD SEALS PU MATERIAL



- ✓ AIL RESISTANT
- ✓ WEAR RESISTANT
- ✓ LONG SERVICE LIFE

PAGE 12

## WIPER SEAL NBR MATERIAL



- ✓ OIL RESISTANT
- ✓ WEAR RESISTANT
- ✓ DURABLE

PAGE 13


## MONO SEAL PU MATERIAL



- ✓ HIGH IMPACT
- ✓ WEAR RESISTANT
- ✓ CHEMICAL RESISTANT

PAGE 14

## GUIDE STRIPS PREMIUM QUALITY



- ✓ LOW FRICTION
- ✓ WEAR RESISTANT
- ✓ EASY TO MACHINE

PAGE 15

## ENGINEERING PLASTIC TUBE PTFE MATERIAL



- ✓ LOW FRICTION
- ✓ CHEMICAL RESISTANT
- ✓ HEAT RESISTANT

PAGE 16

# OUR PRODUCTS

## ENGINEERING PLASTIC ROD

PU MATERIAL



**PU**

(POLYURETHANE)

- ✓ HIGH IMPACT
- ✓ WEAR RESISTANT
- ✓ CHEMICAL RESISTANT

PAGE 17

## SPIRAL WOUND GASKET

STAINLESS STEEL WITH GREEN FILLER



**STAINLESS STEEL**

- ✓ HIGH PRESSURE
- ✓ CORROSION RESISTANT
- ✓ VERSATILE SEALING

PAGE 18

## NON-ASBESTOS COMPRESSED GASKET SHEETS



**CNAF**

(COMPRESSED NON-ASBESTOS FIBER)

- ✓ PIPING
- ✓ HVAC
- ✓ GENERAL INDUSTRY

PAGE 19

## MECHANICAL PACKINGS

GRAPHITE MATERIAL



**GRAPHITE**

(CARBON)

- ✓ HIGH TEMPERATURE
- ✓ HIGH PRESSURE
- ✓ CHEMICAL RESISTANT

PAGE 20

## MECHANICAL SHAFT SEAL

CARBON/CERAMIC MATERIAL



**CARBON CERAMIC**

- ✓ HIGH PRESSURE
- ✓ CHEMICAL RESISTANT
- ✓ LOW FRICTION

PAGE 21

## RUBBER SHEETS

NBR MATERIAL



**NBR**

(NITRILE BUTADIENE RUBBER)

- ✓ OIL RESISTANT
- ✓ CHEMICAL RESISTANT
- ✓ HIGHLY DURABLE

PAGE 22

## O-RING STRIPS

NBR MATERIAL



**NBR**

(NITRILE BUTADIENE RUBBER)

- ✓ OIL RESISTANT
- ✓ CHEMICAL RESISTANT
- ✓ HIGHLY DURABLE

PAGE 23

# SIZING GUIDE

## HOW TO READ SEAL SIZES

To ensure proper fit and reliable performance, it is important to identify the correct seal dimensions. Most sealing products are specified using the following measurements:

**OD × ID × THK (mm)**

### OD (Outer Diameter)

- The outside diameter of the seal

### ID (Inner Diameter)

- The inside diameter or shaft size

### THK (Thickness)

- The width or cross-section of the seal

♦ All sizes in this catalogue are in millimeters (mm).

## O-Ring Sizing Guide

O-rings are typically identified by Inner Diameter (ID) and cross-section (THK).

### Example:

**ID: 30 mm | THK: 1.78 mm**



O-Ring NBR 70  
10 x 2 mm

For accurate selection, customers may provide:

- ID × THK, or
- OD × ID × THK (if available)

## Oil Seal Sizing Guide

Oil seals are commonly specified using:  
ID × OD × THK (mm)

- ID: Shaft diameter
- OD: Housing diameter
- THK: Seal width

Providing all three measurements ensures correct sealing and fit.



Oil Seal TC NBR  
8 x 14 x 4

## Hydraulic Seal Sizing Guide

Hydraulic seals may vary by application (rod, piston, wiper).

To assist with correct selection, please provide:

- Seal type (Rod / Piston / Wiper)
- ID × OD × THK (mm)
- Operating conditions (pressure, temperature if known)

# PRODUCT LIST

# O-RINGS

## TYPES AVAILABLE ▼

TYPE	COLOR	USES	SIZE AVAILABILITY
<b>NITRILE (NBR)</b>	BLACK	General Oil Resistant	ALL
<b>VITON (FKM)</b>	BROWN	High heat chemical	ALL



## SIZE AVAILABLE ▼

### SIZE RANGE (NITRILE)

MEASUREMENT	MIN	MAX
<b>INSIDE DIAMETER</b>	0001.78 mm	284.50 mm
<b>OUTSIDE DIAMETER</b>	0003.56 mm	301.30 mm
<b>THICKNESS</b>	01.78 mm	08.40 mm

### SIZE RANGE (VITON)

MEASUREMENT	MIN	MAX
<b>INSIDE DIAMETER</b>	V002.57 mm	V149.60 mm
<b>OUTSIDE DIAMETER</b>	005.14 mm	161.00 mm
<b>THICKNESS</b>	01.78 mm	05.70 mm

## APPLICATIONS ▼

- ✓ Hydraulic cylinders
- ✓ Excavators & heavy equipment
- ✓ Industrial machinery
- ✓ Mobile hydraulics

## HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

# PRODUCT LIST

# OIL SEAL

## TYPES AVAILABLE ▼

TYPE	LIP	USES	SIZE AVAILABILITY
VC	Single	Light duty sealing	Limited
TC / TCR	Double w/Spring	General oil sealing	Available
TAY	Double w/Spring	Dusty environment sealing	Limited
HTCR	Double w/Spring	High temperature sealing	Limited
HTB29R	Double w/Spring	Heavy duty sealing	Limited



## APPLICATIONS ▼

- ✓ Motors & gearboxes
- ✓ Pumps & compressors
- ✓ Automotive engines & transmissions
- ✓ Industrial machinery

## SIZE AVAILABLE ▼

### SIZE RANGE AVAILABLE

TYPE	INSIDE DIAMETER		OUTSIDE DIAMETER		THICKNESS	
	MIN	MAX	MIN	MAX	MIN	MAX
VC	008 mm	008 mm	014 mm	014 mm	04 mm	04 mm
TC/TCR	010 mm	100 mm	022 mm	114 mm	07 mm	13 mm
TAY	027 mm	077 mm	043 mm	102 mm	09 mm	10/19 mm
HTCR	027 mm	050 mm	043 mm	068 mm	09 mm	09 mm
HTB29R	058 mm	058 mm	103 mm	103 mm	11/19 mm	11/19 mm

## HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

# PRODUCT LIST

## WEAR RING

### VARIANTS AVAILABLE ▼



**WEAR RINGS**

MATL	USES	FEATURES	SIZE AVAILABILITY
PHE	Prevents dirt, dust, and moisture from entering the cylinder	Extends service life of rod and piston seals	Available

### SIZE AVAILABLE ▼



### APPLICATIONS ▼

- ✓ Excavators & heavy equipment
- ✓ Outdoor hydraulic cylinders
- ✓ Agricultural machinery
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

### SIZE RANGE

MEASUREMENT	MIN	MAX
<b>Inside Diameter</b>	040.00 mm	135.00 mm
<b>Outside Diameter</b>	045.00 mm	140.00 mm
<b>Thickness</b>	15.00 mm	35.00 mm

# PRODUCT LIST

## PISTON SEALS

### VARIANTS AVAILABLE ▼



**GSF**



**SPG**



**SPGW**

VARIANT	MATL	USES	FEATURES	SIZE AVAILABILITY
<b>GSF</b>	DC12	High-pressure, double-acting hydraulic cylinders	High wear resistance, Low friction, excellent wear resistance, long service life	Available
<b>SPG</b>	DC12	Medium to high pressure applications	Stable sealing performance, suitable for heavy-duty cylinders	Available
<b>SPGW</b>	DC12	High pressure with side load	Wider profile for improved stability and durability	Available

### SIZE RANGE

TYPE	INSIDE DIAMETER		OUTSIDE DIAMETER		THICKNESS	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>GSF</b>	029.00 mm	109 mm	0.40 mm	130 mm	04.20 mm	08.10 mm
<b>SPG</b>	050.00 mm	104 mm	060.00 mm	120 mm	04.50 mm	07.50 mm
<b>SPGW</b>	055.00 mm	127 mm	070.00 mm	127 mm	10.50 mm	15.50 mm

### APPLICATIONS ▼

- ✓ Hydraulic cylinders
- ✓ Excavators & heavy equipment
- ✓ Industrial presses
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

# PRODUCT LIST

## ROD SEALS

### VARIANTS AVAILABLE ▼



**U-SEAL (STD)**



**BRT**

VARIANT	MATL	USES	FEATURES	SIZE AVAILABILITY
<b>U-SEAL STD</b>	PU	General-purpose hydraulic rod sealing		Available
<b>U-SEAL MM</b>	NBR/PU	Cylinders requiring metric groove standards	Reliable sealing under dynamic movement	Available
<b>BRT</b>	P10	High-pressure hydraulic cylinders	Handles pressure spikes and reduces extrusion	Available
<b>LBH</b>	NBR/PU	Limited installation space	High sealing efficiency with reduced friction	Available

### APPLICATIONS ▼

- ✓ Hydraulic cylinders
- ✓ Construction machinery
- ✓ Industrial machinery
- ✓ Mobile hydraulic systems

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

### SIZE RANGE

TYPE	INSIDE DIAMETER		OUTSIDE DIAMETER		THICKNESS	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>U-SEAL STD</b>	029.00 mm	109 mm	0.40 mm	130 mm	04.20 mm	08.10 mm
<b>U-SEAL MM</b>	050.00 mm	104 mm	060.00 mm	120 mm	04.50 mm	07.50 mm
<b>BRT</b>	055.00 mm	127 mm	070.00 mm	127 mm	10.50 mm	15.50 mm
<b>LBH</b>	013.00 mm	110 mm	020.00 mm	120 mm	05/06.5 mm	08 mm

# PRODUCT LIST

## WIPER SEAL

### VARIANTS AVAILABLE ▼

VARIANT	MATL	USES	FEATURES	SIZE AVAILABILITY
DKB	NBR	Prevents dirt, dust, and moisture from entering the cylinder	Extends service life of rod and piston seals	Available

### SIZE AVAILABLE ▼

SIZE RANGE		
MEASUREMENT	MIN	MAX
Inside Diameter	020.00 mm	140 mm
Outside Diameter	032.00 mm	160 mm
Height/Width	06/09 mm	10/14 mm



**WIPER SEAL**

### APPLICATIONS ▼

- ✓ Excavators & heavy equipment
- ✓ Outdoor hydraulic cylinders
- ✓ Agricultural machinery
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

## PRODUCT LIST

# MONO SEAL



### VARIANTS AVAILABLE ▼

MATERIAL	USES	FEATURES	SIZE AVAILABILITY
PU	Standard Hydraulic pistons	High wear resistance, long service life	Available
NBR	Light-medium duty hydraulics	Oil resistant, economical	Available
PTFE (OPTIONAL)	High Performance systems	Low friction, high pressure	Limited

### APPLICATIONS ▼

- ✓ Hydraulic cylinders
- ✓ Compact machinery
- ✓ Agricultural equipment
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

### SIZE AVAILABLE ▼

SIZE RANGE		
MEASUREMENT	MIN	MAX
<b>Inside Diameter</b>	19.05	23
<b>Outside Diameter</b>		
<b>Thickness</b>		

## PRODUCT LIST

# GUIDE STRIPS

### VARIANTS AVAILABLE ▼

MATERIAL	USES	FEATURES	SIZE AVAILABILITY
G11	Prevents dirt, dust, and moisture from entering the cylinder	Extends service life of rod and piston seals	Available

### SIZE AVAILABLE ▼


SIZE RANGE		
MEASUREMENT	MIN	MAX
THICKNESS	01.00 mm	05.00 mm
WIDTH	008.10 mm	025.00 mm

### APPLICATIONS ▼

- ✓ Excavators & heavy equipment
- ✓ Outdoor hydraulic cylinders
- ✓ Agricultural machinery
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

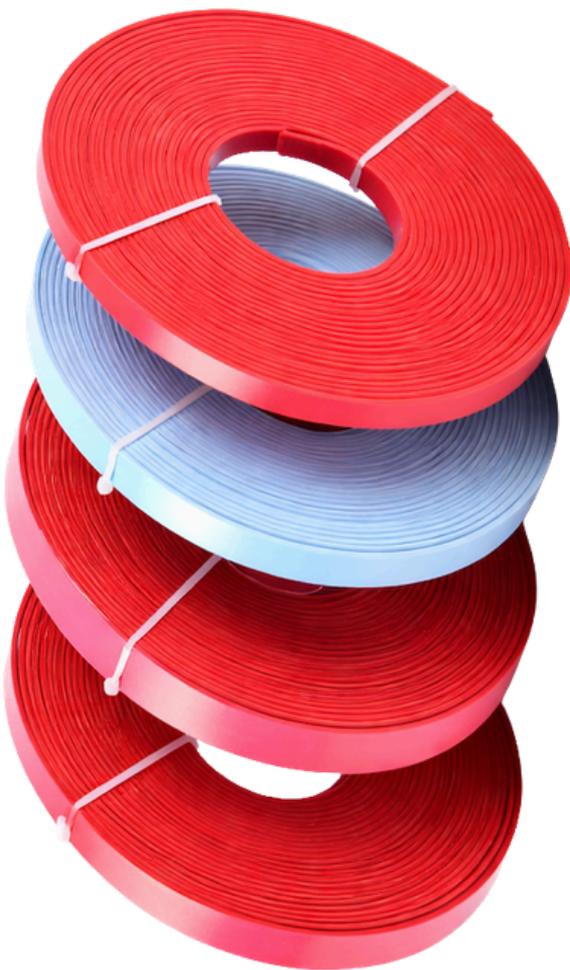

## PRODUCT LIST

# ENGINEERING PLASTIC TUBE

### VARIANTS AVAILABLE ▼



MATERIAL	USES	FEATURES	SIZE AVAILABILITY
<b>PTFE+Bronze Tube</b>	Prevents dirt, dust, and moisture from entering the cylinder	Extends service life of rod and piston seals	Available

### SIZE AVAILABLE ▼

SIZE RANGE		
MEASUREMENT	MIN	MAX
<b>INSIDE DIAMETER</b>	018 mm	150 mm
<b>OUTSIDE DIAMETER</b>	030 mm	350 mm
<b>LENGTH</b>	150 mm	150 mm

### APPLICATIONS ▼

- ✓ Excavators & heavy equipment
- ✓ Outdoor hydraulic cylinders
- ✓ Agricultural machinery
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

# PRODUCT LIST

## ENGINEERING PLASTIC ROD

### VARIANTS AVAILABLE ▼

MATERIAL	USES	FEATURES	SIZE AVAILABILITY
<b>PU</b>	High-pressure, double-acting hydraulic cylinders	High wear resistance, Low friction, excellent wear resistance, long service life	Available
<b>PTFE</b>	Medium to high pressure applications	Stable sealing performance, suitable for heavy-duty cylinders	Available
<b>UHMWPE</b>	High pressure with side load	Wider profile for improved stability and durability	Available

### SIZE RANGE

TYPE	INSIDE DIAMETER		OUTSIDE DIAMETER		LENGTH	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>PU</b>	00 mm	00 mm	040 mm	150 mm	500 mm	500 mm
<b>PTFE</b>	00 mm	00 mm	025 mm	120 mm	1000 mm	1000 mm
<b>UHMWPE</b>	00 mm	00 mm	035 mm	250 mm	1000 mm	1000 mm

### APPLICATIONS ▼

- ✓ Hydraulic cylinders
- ✓ Excavators & heavy equipment
- ✓ Industrial presses
- ✓ Mobile hydraulics

### HOW TO ORDER

1. Send your ID × OD × Width
2. Specify application & pressure
3. Confirm quantity
4. We'll quote & we ship nationwide

# PRODUCT LIST

## SPIRAL WOUND GASKET

### VARIANTS AVAILABLE ▼



MATERIAL	USES	FEATURES	SIZE AVAILABILITY
<b>SS + Graphite (CG/CCI)</b>	Steam lines, oil & gas, refineries	Excellent sealing, high-temp, pressure stable	Limited
<b>SS + PTFE</b>	Chemical lines, corrosive media	Chemical resistant, clean sealing	Limited
<b>SS + Graphite + Inner Ring</b>	High-pressure pipelines	Prevents blowout, protects gasket core	Limited
<b>SS + Graphite + Inner &amp; Outer Ring</b>	Critical flanges, high pressure & temp	Maximum safety, alignment support	Limited
<b>Carbon Steel &amp; Graphite</b>	General Industrial Piping	Cost-Effective, reliable sealing	Limited

### APPLICATIONS ▼

- ✓ Industrial pipelines
- ✓ Steam systems
- ✓ Oil & fuel lines
- ✓ Pump & valve flanges

### HOW TO ORDER

1. Send nominal size, pressure class, and thickness
2. Specify application
3. Confirm quantity
4. We'll quote & ship nationwide

### SIZE RANGE

MEASUREMENT	MIN	MAX
<b>NOMINAL SIZE (NB/DN)</b>	DN 15 (1/2")	DN 600 (24)
<b>PRESSURE CLASS</b>	CLASS 150	CLASS 600
<b>THICKNESS</b>	3.2 mm	4.5 mm

\*\*\*Custom sizes available upon request.

# PRODUCT LIST

## NON-ASBESTOS COMPRESSED GASKET SHEETS

### VARIANTS AVAILABLE ▼



MATERIAL	USES	FEATURES	SIZE AVAILABILITY
<b>CNAF (General Grade)</b>	Water, air, mild oil applications	Good sealing performance, economical, general purpose	Limited
<b>CNAF (Oil Resistant)</b>	Oil, fuel, industrial pipelines	Steam lines, high-temp flanges	Limited
<b>CNAF (High Temp Grade)</b>	Steam lines, high-temp flanges	Heat resistant, pressure stable, durable	Limited

### APPLICATIONS ▼

- ✓ Industrial pipelines
- ✓ Steam systems
- ✓ Oil & fuel lines
- ✓ Pump & valve flanges

### HOW TO ORDER

1. Send thickness × sheet size
2. Specify application (oil, steam, water)
3. Confirm quantity
4. We'll quote & ship nationwide

### SIZE RANGE

MEASUREMENT	MIN	MAX
<b>THICKNESS</b>	0.5 mm	6.00 mm
<b>WIDTH</b>	1000 mm	1500 mm
<b>LENGHT</b>	1000 mm	2000 mm

# PRODUCT LIST

# MECHANICAL PACKINGS

## VARIANTS AVAILABLE ▼



VARIANT	USES	FEATURES	SIZE AVAILABILITY
<b>Graphite Packing</b>	High-temp pumps & valves	Heat resistant, self-lubricating	Available
<b>PTFE Packing</b>	Chemical pumps	Chemical resistant, low friction	Available
<b>Aramid Packing</b>	Abrasive media, slurry pumps	Handles pressure spikes and reduces extrusion	Available
<b>Gland Packing (Fiber)</b>	General water pumps	Economical, reliable sealing	Available

## APPLICATIONS

- ✓ Pumps
- ✓ Valves
- ✓ Mixers
- ✓ Industrial machinery

## HOW TO ORDER

1. Send shaft diameter
2. Specify pump model
3. Provide media & pressure
4. We'll quote & ship nationwide

## SIZE RANGE

TYPE	INSIDE DIAMETER		OUTSIDE DIAMETER		THICKNESS	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>Graphite</b>	4.0 mm	25.0 mm	10 mm	300 mm	20 mm	150 mm
<b>PTFE</b>	3.0 mm	20.0 mm	20 mm	200 mm	15 mm	120 mm
<b>ARAMID</b>	5.0 mm	50.0 mm	20 mm	400 mm	40 mm	250 mm
<b>FIBER</b>	4.0 mm	30.0 mm	20 mm	300 mm	25 mm	180 mm

## PRODUCT LIST

# MECHANICAL SHAFT SEALS

### VARIANTS AVAILABLE ▼

MATERIAL	USES	FEATURES	SIZE AVAILABILITY
<b>Carbon/Ceramic</b>	Water pumps	Standard industrial use	Limited
<b>Silicon Carbide</b>	Chemical & high-speed pumps	Superior wear resistance	Limited
<b>Tungsten Carbide</b>	Heavy-duty pumps	High durability & pressure resistance	Limited

### SIZE RANGE

TYPE	SHAFT DIAMETER (ID)		HOUSING DIAMETE (OD)		SEAL WIDTH/HEIGHT	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>U-SEAL STD</b>	10 mm	100 mm	20 mm	140 mm	5 mm	30 mm
<b>U-SEAL MM</b>	10 mm	150 mm	20 mm	200 mm	5 mm	25 mm
<b>BRT</b>	12 mm	300 mm	25 mm	400 mm	10 mm	60 mm

### APPLICATIONS ▼

- ✓ Water pumps
- ✓ Chemical pumps
- ✓ Food processing equipment
- ✓ Industrial machinery

### HOW TO ORDER

1. Send shaft diameter
2. Specify pump model
3. Provide media & pressure
4. We'll quote & ship nationwide



# PRODUCT LIST

## RUBBER SHEETS

### VARIANTS AVAILABLE ▼

VARIANT	USES	FEATURES	SIZE AVAILABILITY
<b>NBR RUBBER</b>	Oil-resistant applications	Excellent oil resistance	Available
<b>EPDM RUBBER</b>	Outdoor & Water Exposure	UV & Weather Resistant	Available
<b>NEOPRENE</b>	General industrial use	Good Chemical Stability	Available
<b>SILICONE</b>	High Temperature Areas	Heat resistant up to 250°C	Available

### SIZE RANGE

TYPE	THICKNESS		WIDTH		LENGTH	
	MIN	MAX	MIN	MAX	MIN	MAX
<b>RUBBER SHEET</b>	01.00 mm	10.00 mm	1000 mm	1500 mm	1000 mm	2000 mm

### APPLICATIONS ▼

- ✓ Gaskets
- ✓ Flooring mats
- ✓ Vibration pads
- ✓ Industrial lining

### HOW TO ORDER

1. Send thickness × sheet size
2. Specify material
3. Confirm quantity
4. We'll quote & ship nationwide



# PRODUCT LIST

## O-RING STRIPS

### VARIANTS AVAILABLE ▼

VARIANT	USES	FEATURES	SIZE AVAILABILITY
<b>NBR RUBBER</b>	Oil Sealing	Durable, Oil Resistant	Available
<b>EPDM RUBBER</b>	Water & Outdoor	Weather Resistant	Available
<b>VITON</b>	High Temperature & Chemical	Chemical Resistant	Available
<b>SILICONE</b>	Food & High Heat	Flexible & Heat Resistant	Available

### SIZE RANGE

MEASUREMENT	MIN	MAX
<b>CROSS SECTION RANGE</b>	1.00 mm	20.00 mm

### APPLICATIONS ▼

- ✓ Custom O-rings
- ✓ Hydraulic sealing
- ✓ Automotive sealing
- ✓ Industrial equipment

### HOW TO ORDER

1. Send diameter (mm)
2. Specify material
3. Confirm length or quantity
4. We'll quote & ship nationwide



# CONTACT US



**OIL SEALS | O-RINGS |  
INDUSTRIAL SEALING & OTHER  
INDUSTRIAL PRODUCTS**



# FLR INDUSTRIAL MARKETING

Sealing Solutions and Industrial Products  
You Can Rely On.

09974518904

[sales@flrindustrial.com.ph](mailto:sales@flrindustrial.com.ph)

[www.flrindustrial.com.ph](http://www.flrindustrial.com.ph)

Ground Flr, Fiscal Amosin Bldg.  
Kauswagan, Cagayan de Oro City  
Misamis Oriental, Philippines

**FLR — Fast. Long-Lasting. Reliable.**

